

CGR Normalization

Convert Rates to a Common Surface Process

SPE 199982-MS: M.L. Carlsen^{*1}, M.M. Dahouk¹, A. Hoffmann¹, C.H. Whitson¹

1. Whitson AS

1. CGR Normalization – “Crash Course”


We will Investigate ...

- 1 What is CGR Normalization is
- 2 A method to convert daily rates into a common surface process
- 3 Under what circumstances it is important and why


PVT is “Path Dependent”

(Recap from University)

PVT is “Path Dependent”

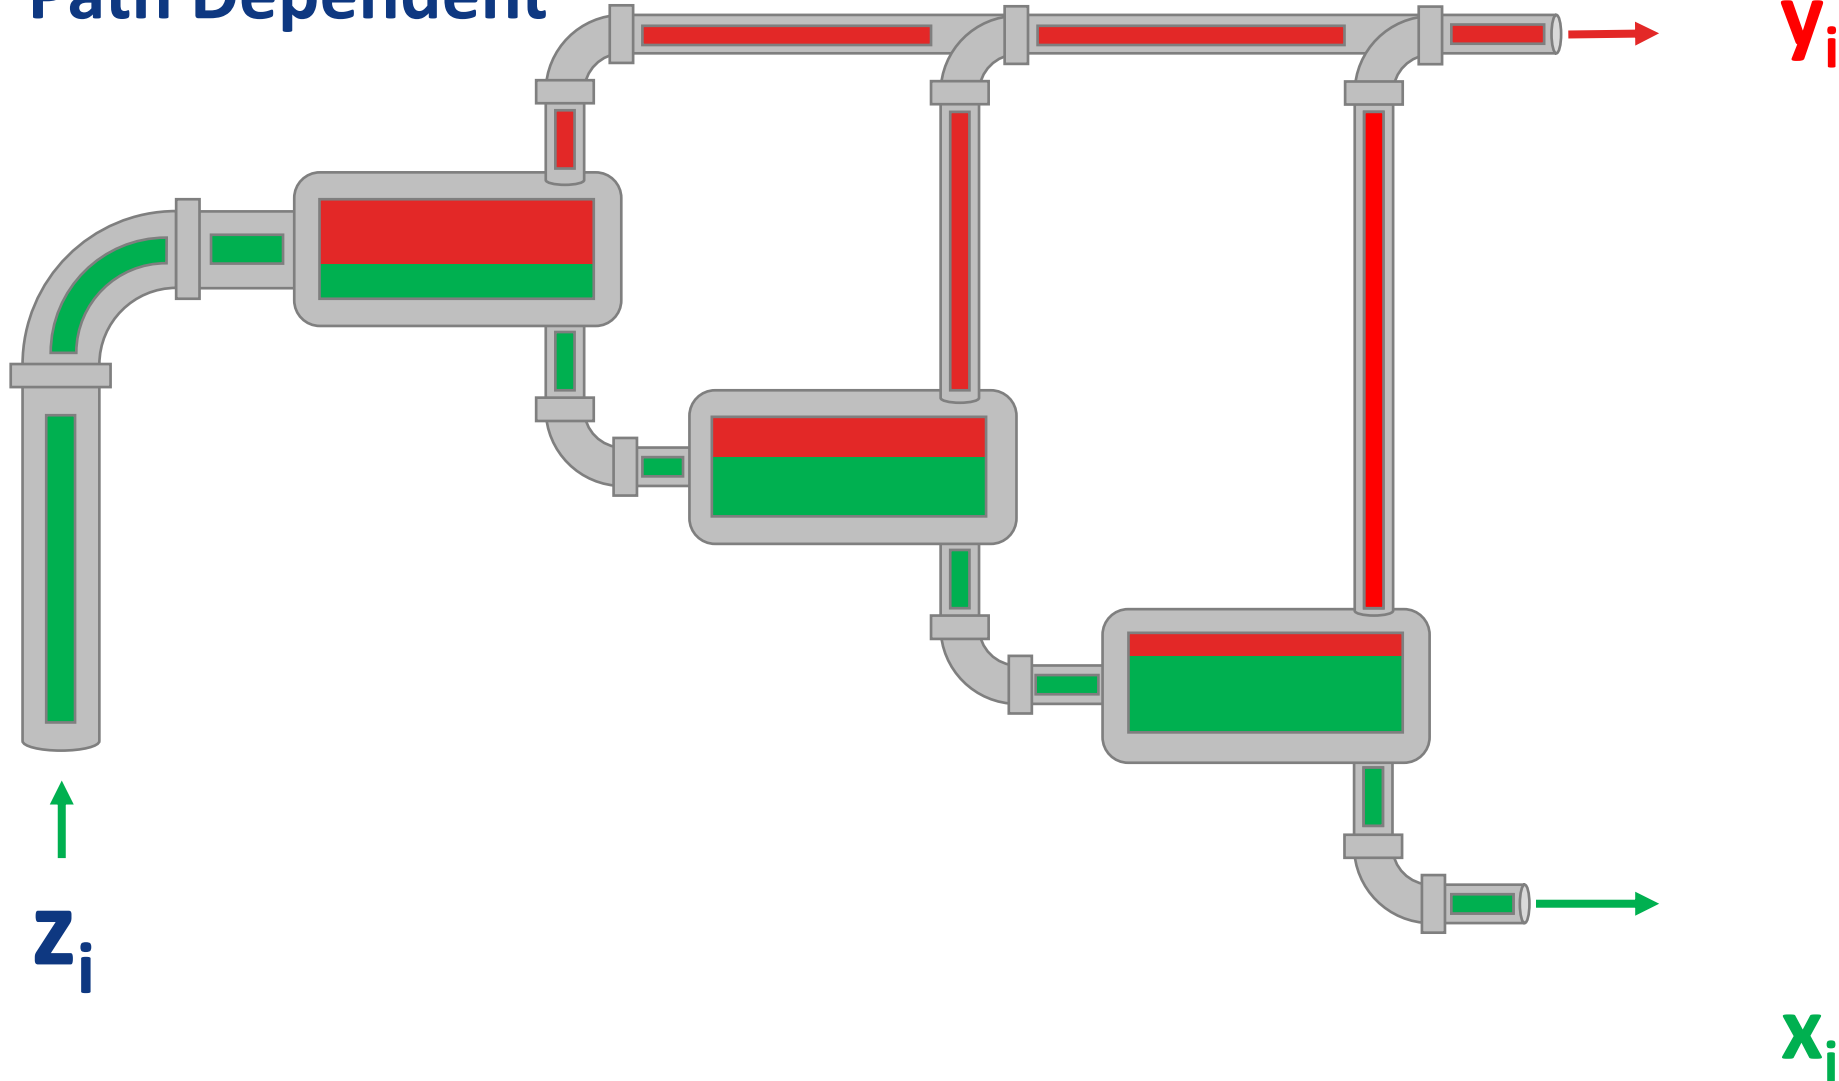

PVT is “Path Dependent”

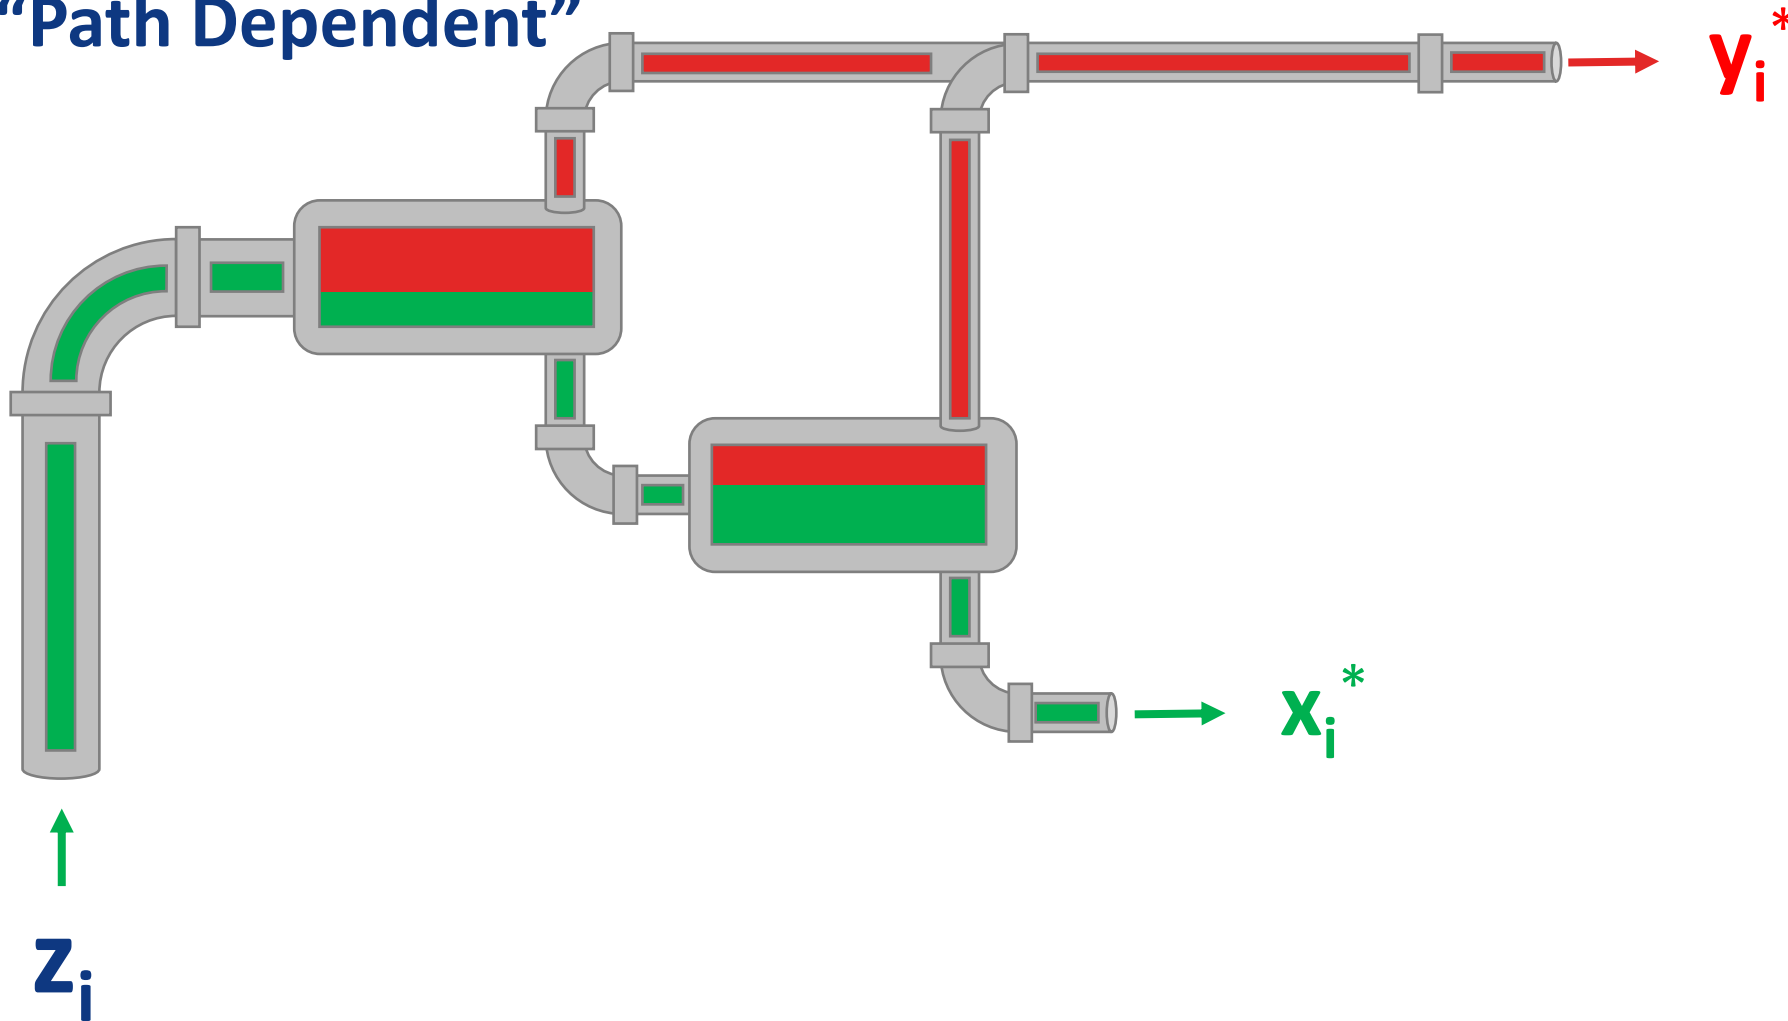


Black Oil PVT Tables


@ $T = \text{constant}$

| Pressure | Oil | | | Gas | | |
|----------|-------|-------|---------|-------|----------|---------|
| p | R_s | B_o | μ_o | r_s | B_{gd} | μ_g |
| | ... | ... | ... | ... | ... | ... |
| | ... | ... | ... | ... | ... | ... |
| | ... | ... | ... | ... | ... | ... |


Res. Simulation




RTA/PTA



Pipe Flow



Process



- B_o | B_{gd} – surface process dependent
 - R_s | r_s – surface process dependent
 - μ_o | μ_g – surface process independent
- 99.99% of reservoir engineering analysis is performed with black oil tables

1 Condensate Gas Ratio (CGR) Normalization


- BOT tables assumes fixed surface process

#stages, p_{sep} , T_{sep}

- In reality, separator conditions change with time


sometimes a lot

CGR Normalization

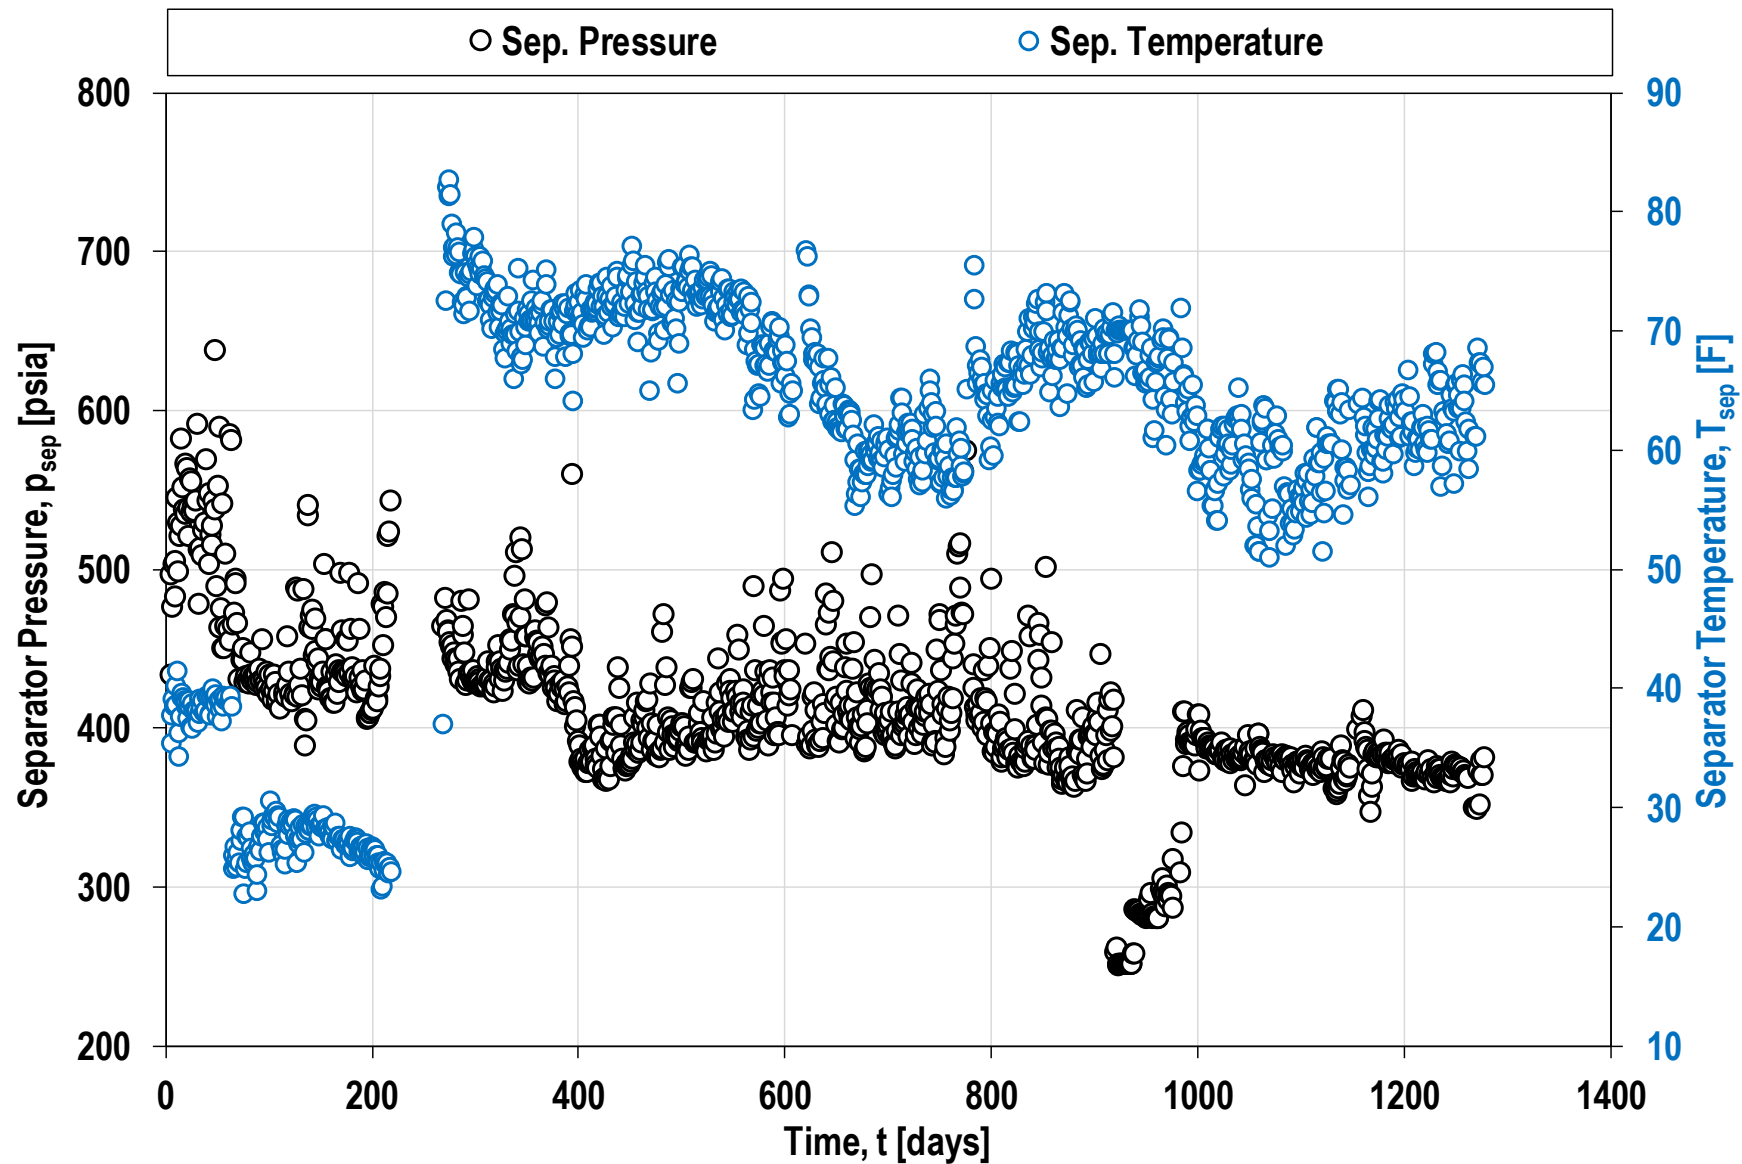


- Risk of inconsistencies between:
 1. Rates used for history matching
→ Assumes Constant Surface Process
 2. Actual measured rates
→ Changing Surface Process

We will Investigate ...

- 1 What is CGR Normalization is 
- 2 A method to convert daily rates into a common surface process
- 3 Under what circumstances it is important and why

We will Investigate ...


- 1 What is CGR Normalization is 
- 2 A method to convert daily rates into a common surface process
- 3 Under what circumstances it is important and why

Two Steps

1. Estimate flowing wellstream composition
→ $z_i(\text{time})$
2. Re-process the wellstream composition
→ Fixed through time

What is a Composition?

“The amount of different components”



usually expressed in mol%

$$z_i = n_i / \sum_j n_j \quad | \quad y_i = n_{vi} / \sum_j n_{vj} \quad | \quad x_i = n_{Li} / \sum_j n_{Lj}$$

Total *Vapor* *Liquid*

What is a Wellstream Composition?

**Wellstream:
composition a well produces
at one point in time**


**Wellstream compositions \neq
in-situ representative fluid compositions**

What is “Compositional Tracking”?

=How produced wellstream compositions change with time

- Non-hydrocarbons (H_2S , CO_2 , N_2)
- Known hydrocarbons (C_1 , C_2 , ..., C_6)
- Single carbon number components (C_{7+})

What is an EOS Model?

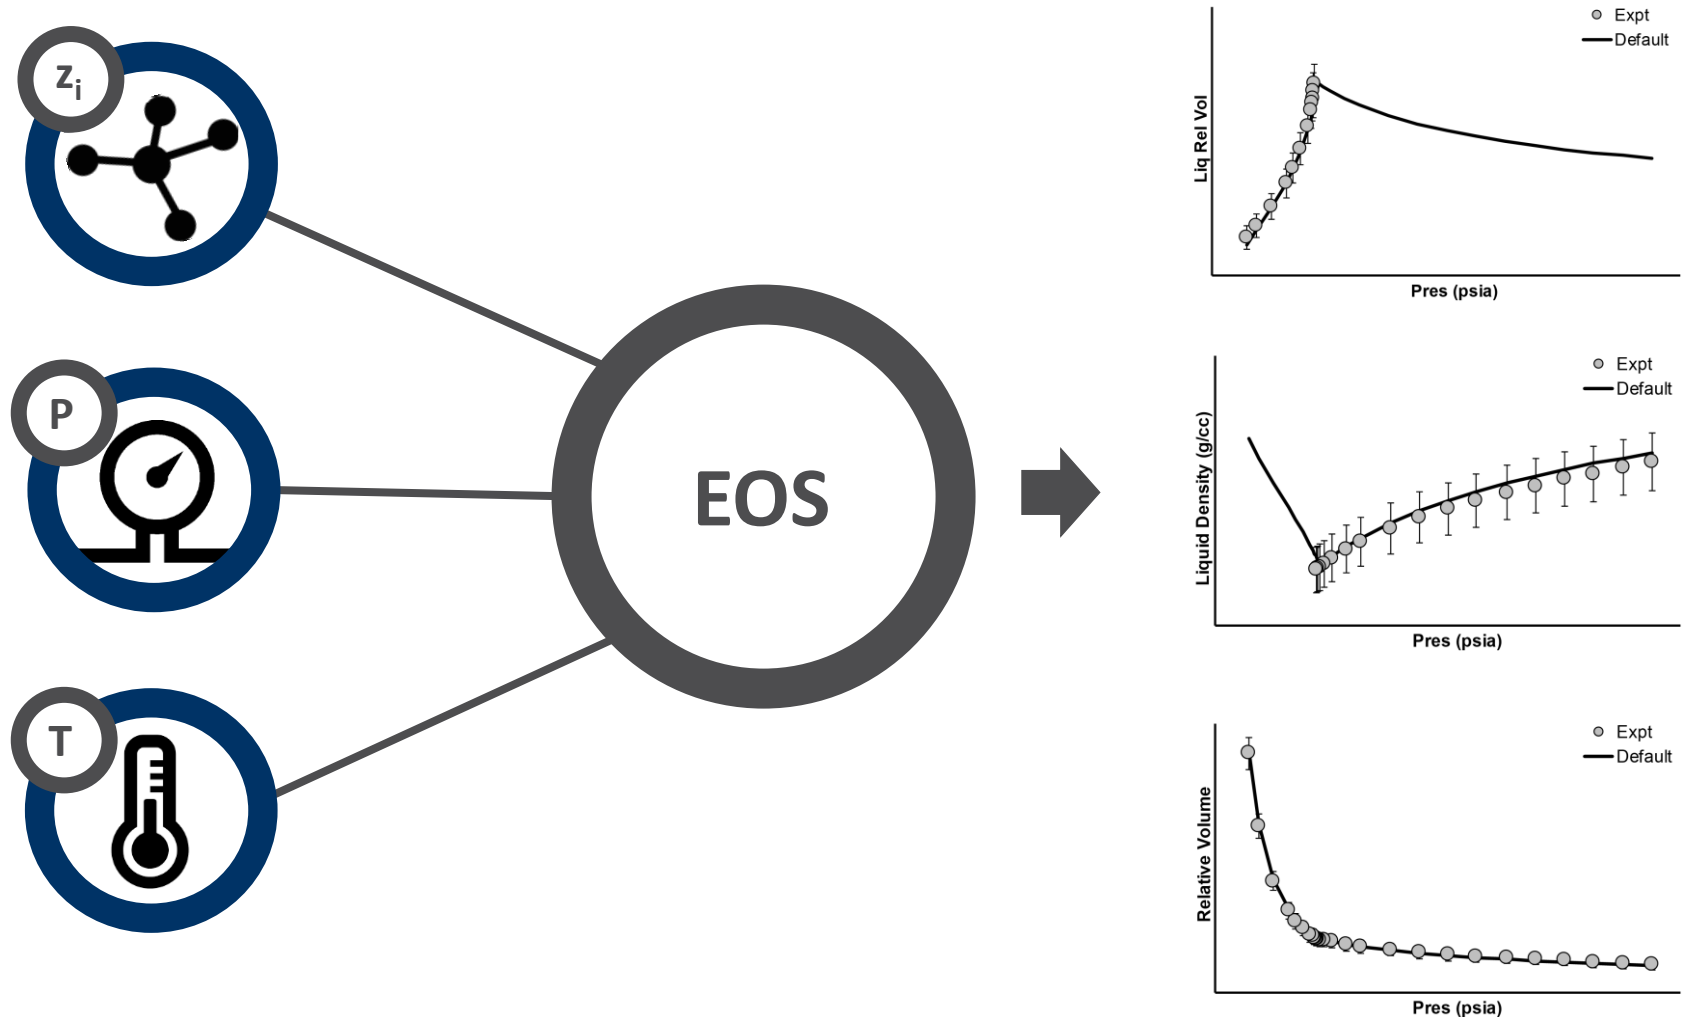

Requirements:

- A properly tuned EOS Model
- Separator rates (GOR_{sep})
- Separator conditions (p_{sep}, T_{sep})
- “Seed feed” – estimate of z_i

Method:



- Flash “seed feed” to $p_{\text{sep}} \mid T_{\text{sep}} \rightarrow y_i, x_i$
- Recombine $y_i \mid x_i$ at $\text{GOR}_{\text{sep}} \rightarrow z_i$

$$n_i = x_i \left(\frac{q_{om}}{v_o} \right) + y_i \left(\frac{q_{gm}}{v_g} \right)$$

v : molar volume – M/ρ (calculated from EOS model)

- Defined same in all modeling tools
 - Res sim, nodal analysis, pipeflow
- Common surface process
 - Multi-stage flash process
 - K-value based surface process
 - Full process (HYSYS/UNISIM)
 - "Normalized CGR"

We will Investigate ...

- 1 What is CGR Normalization is 
- 2 A method to convert daily rates into a common surface process 
- 3 Under what circumstances it is important and why

We will Investigate ...

- 1 What is CGR Normalization is ✓
- 2 A method to convert daily rates into a common surface process ✓
- 3 Under what circumstances it is important and why

Understand how changing separator conditions can impact producing CGR over time

- wide range of wellstream compositions
- changing separator conditions

$$T_{\text{sep}} = 50 - 150 \text{ F}$$


$$p_{\text{sep}} = 50 - 1000 \text{ psia}$$

Quantify sensitivity to different separator conditions

$$\delta = \text{CGR}_{\text{max}} / \text{CGR}_{\text{min}}$$

E.g. $\delta = 2$, max CGR is twice of min CGR

When is it Important and Why?

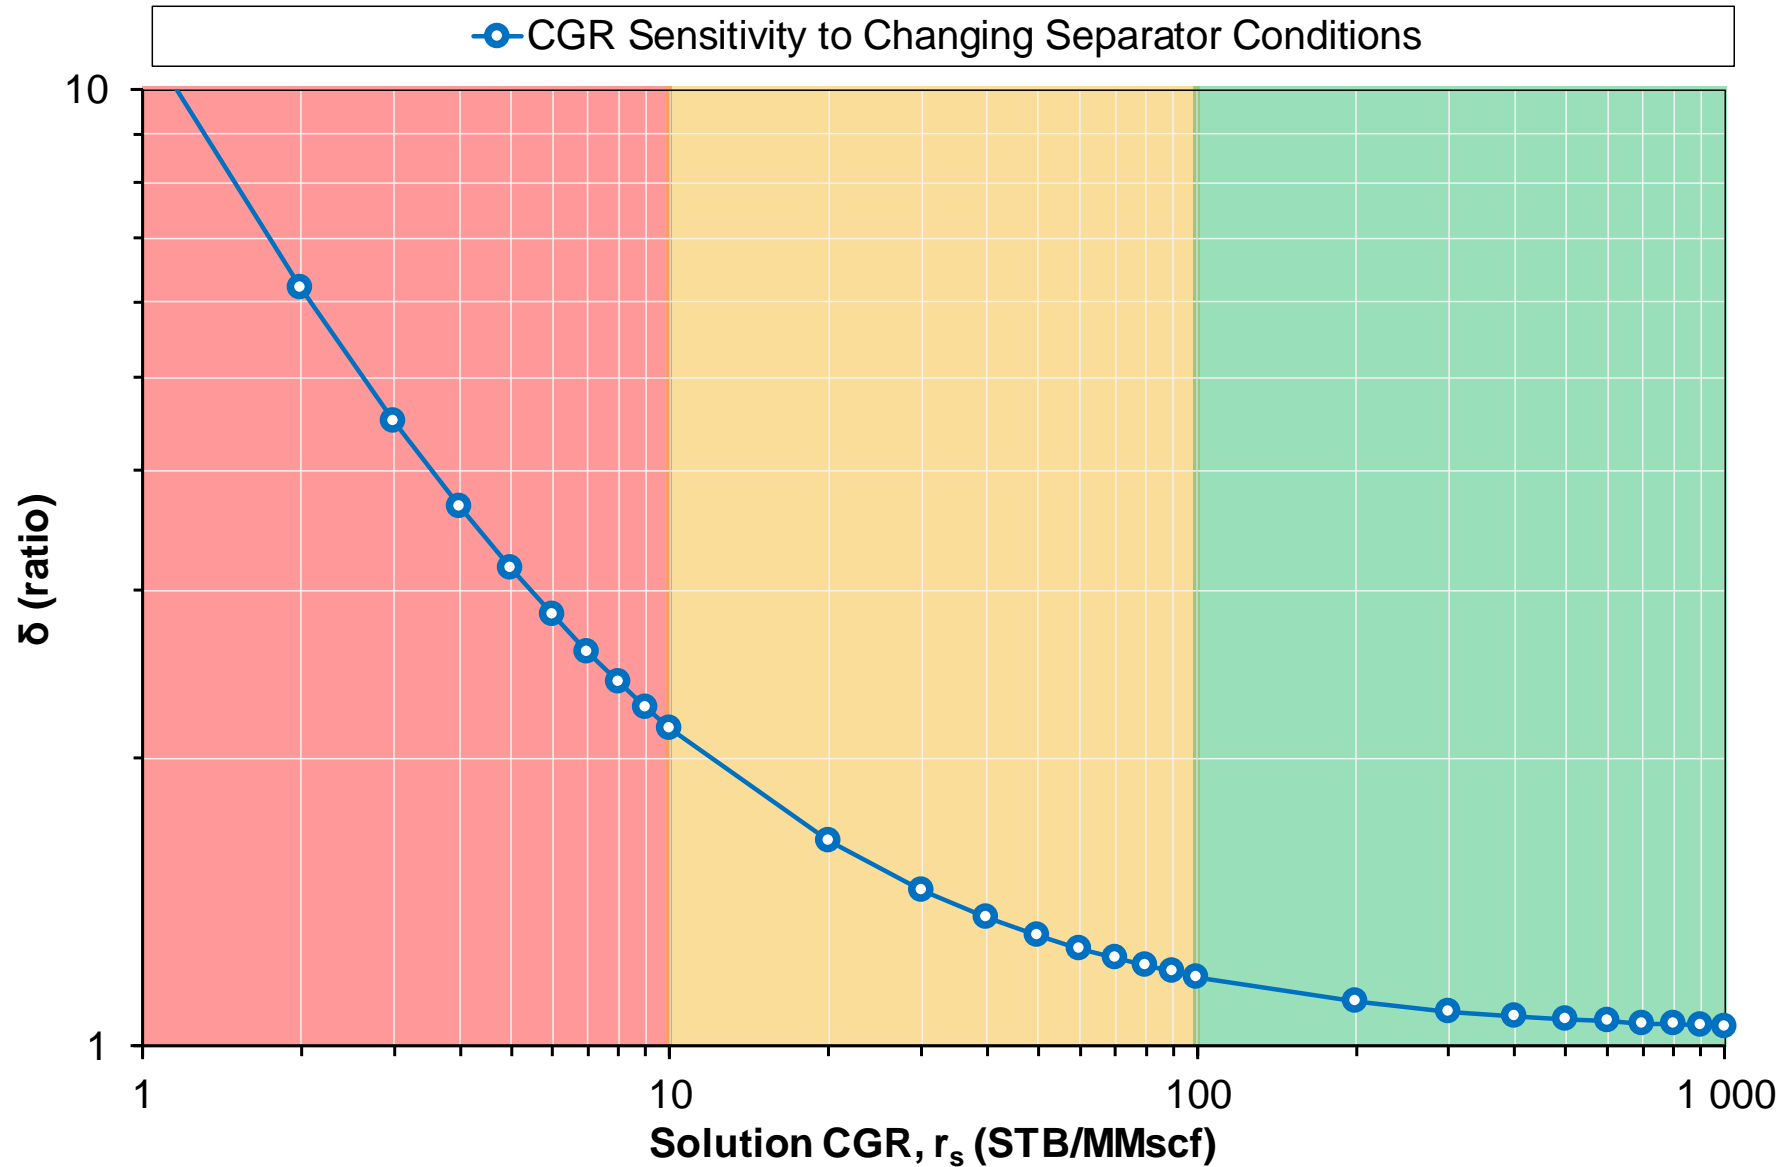


We will Investigate ...


- 1 What is CGR Normalization is ✓
- 2 A method to convert daily rates into a common surface process ✓
- 3 Under what circumstances it is important and why ✓

2.Example


Example: Reservoir Simulation

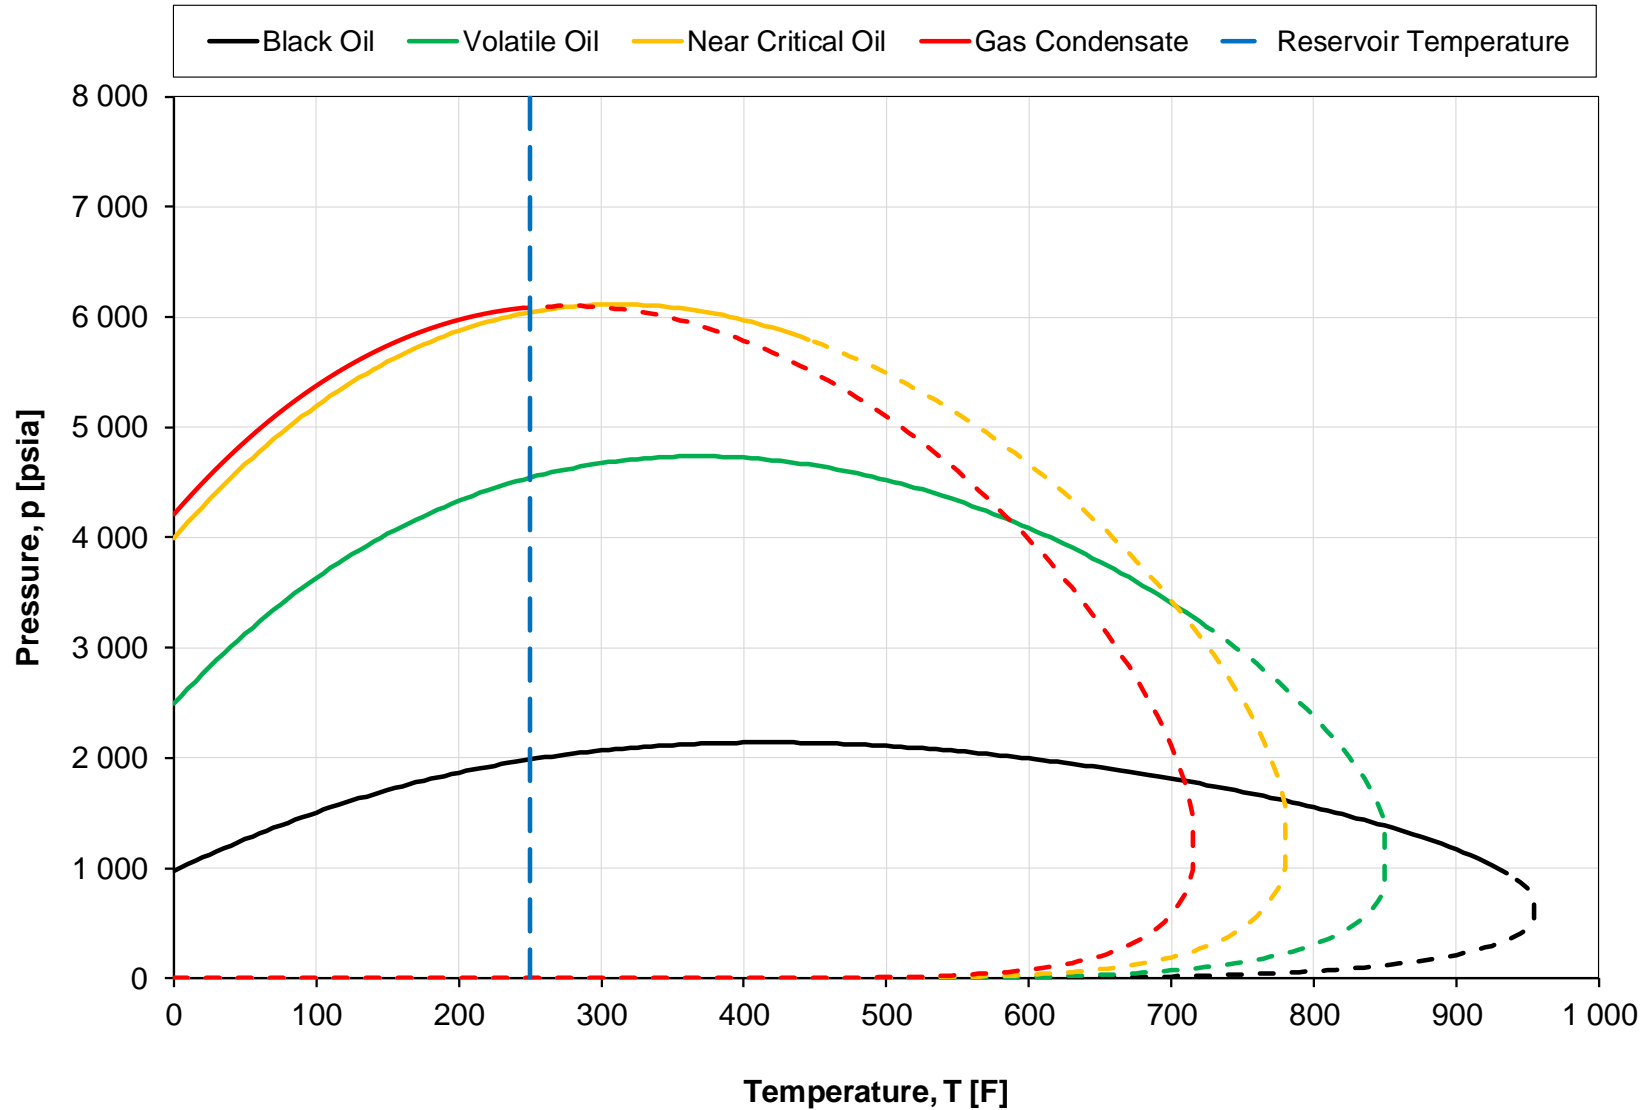


Example: Reservoir Simulation

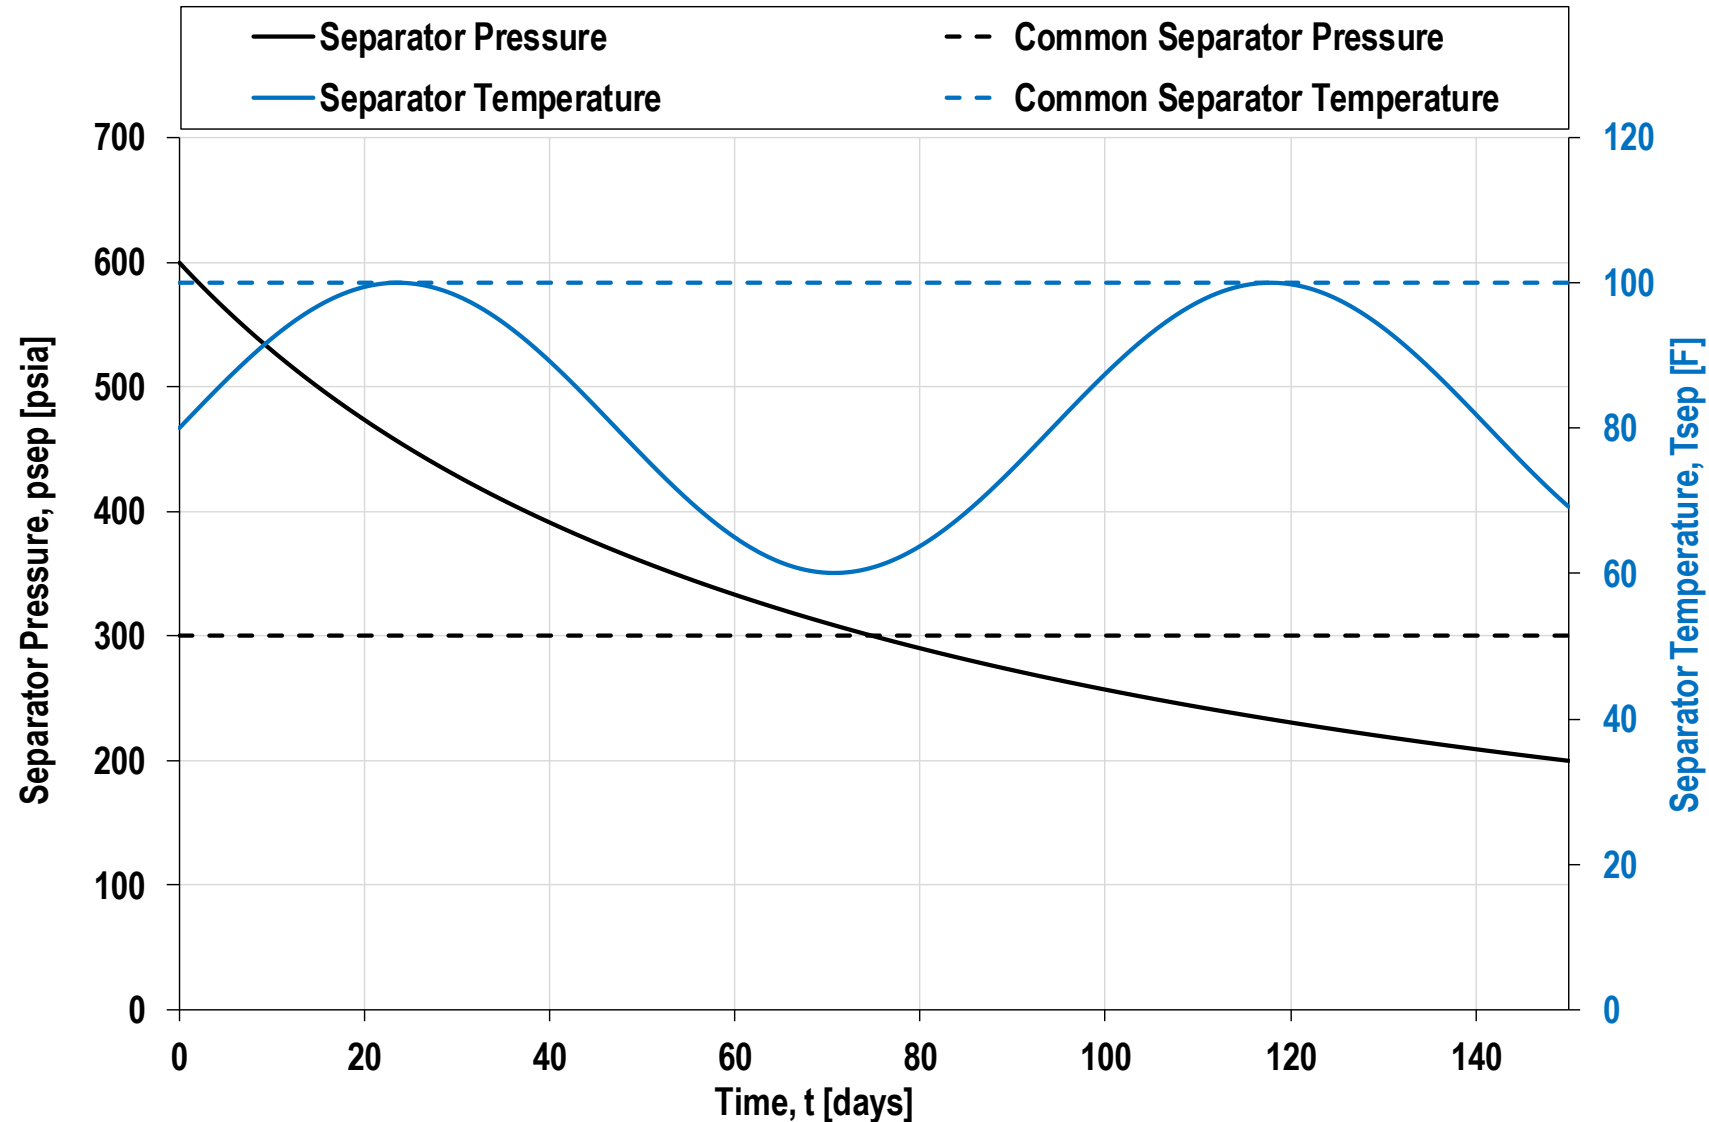


Example: Reservoir Simulation

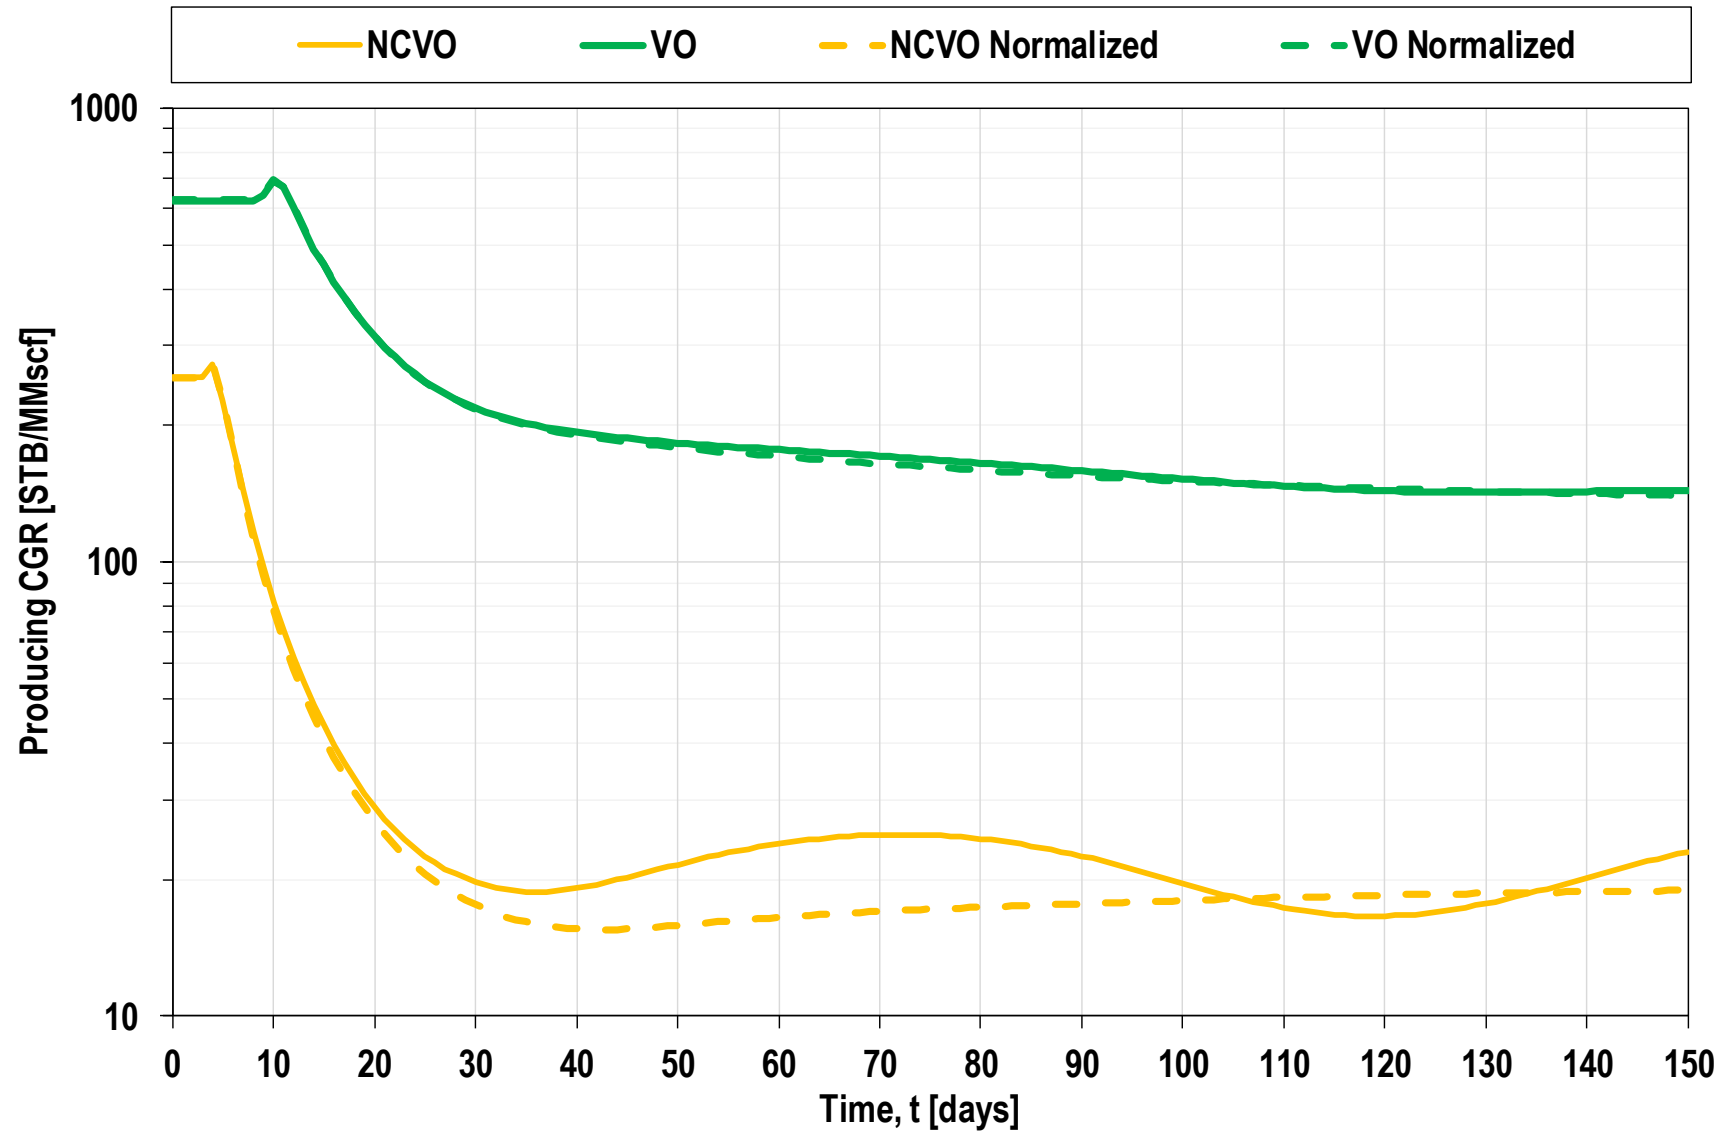


Example: Reservoir Simulation

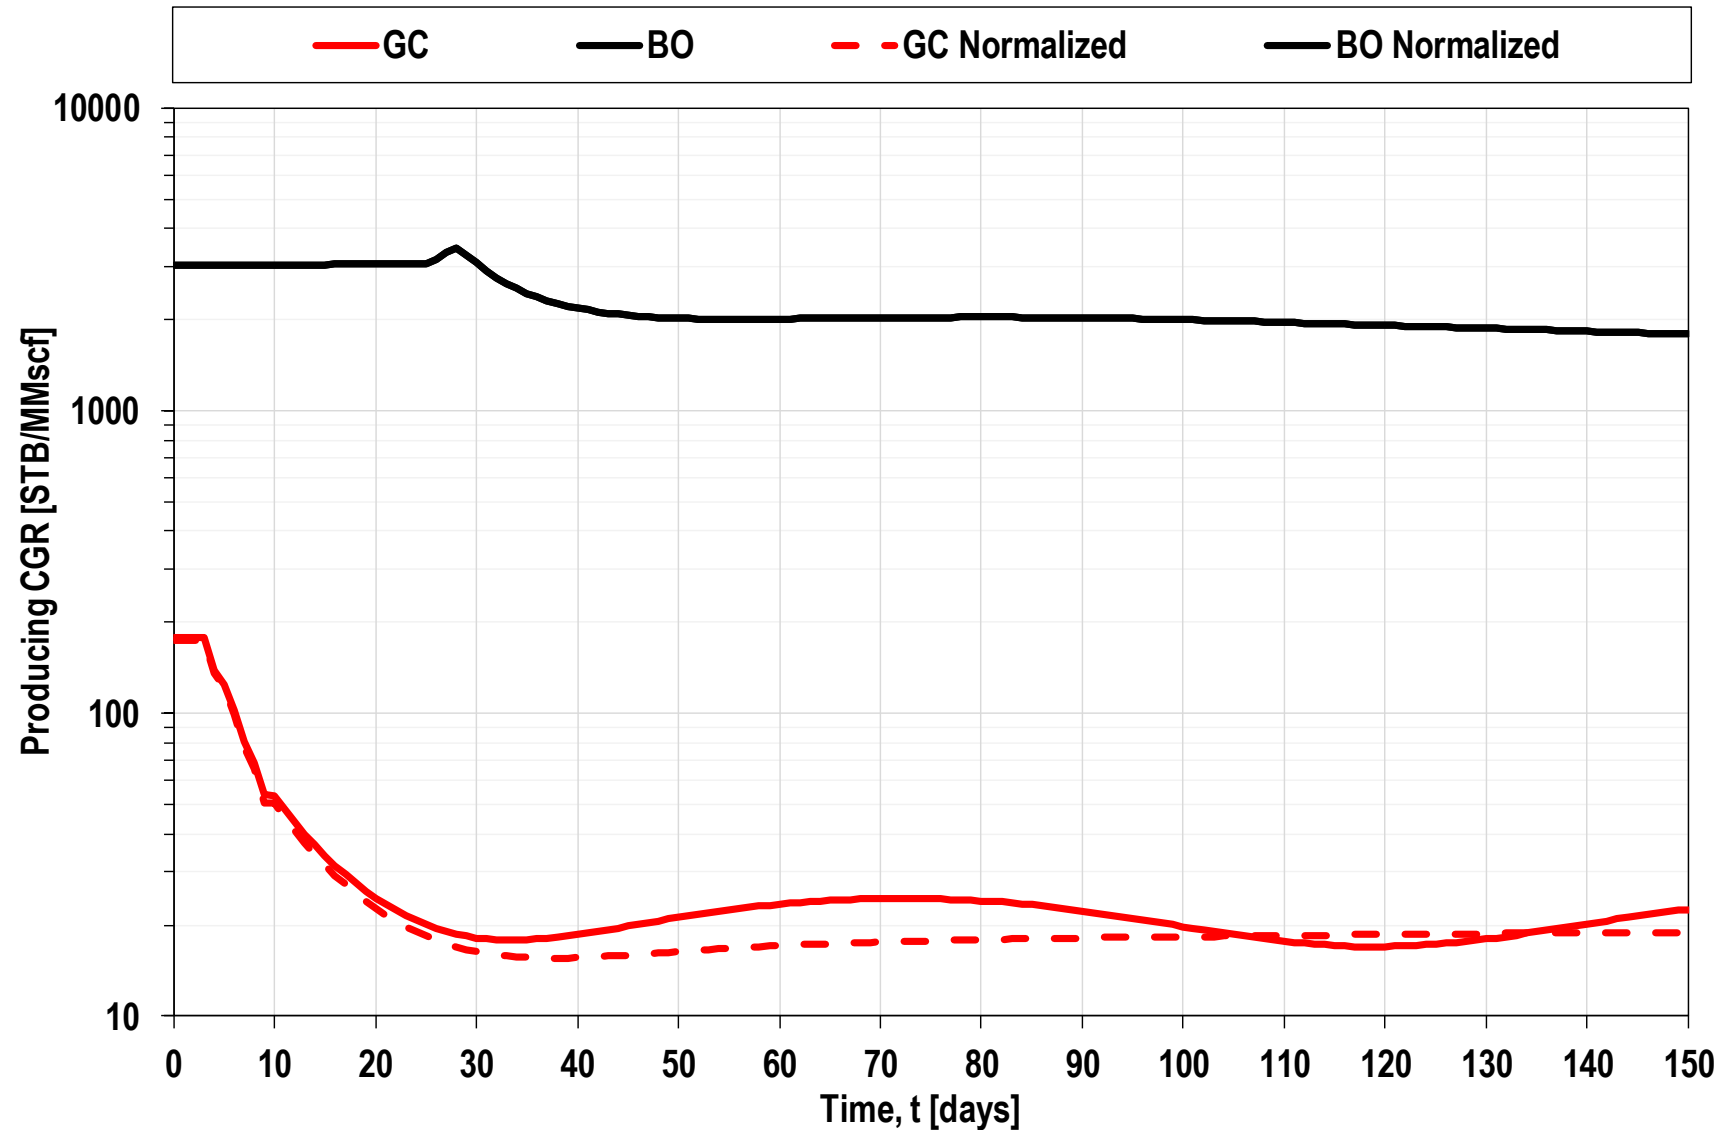


Example: Field Example 1

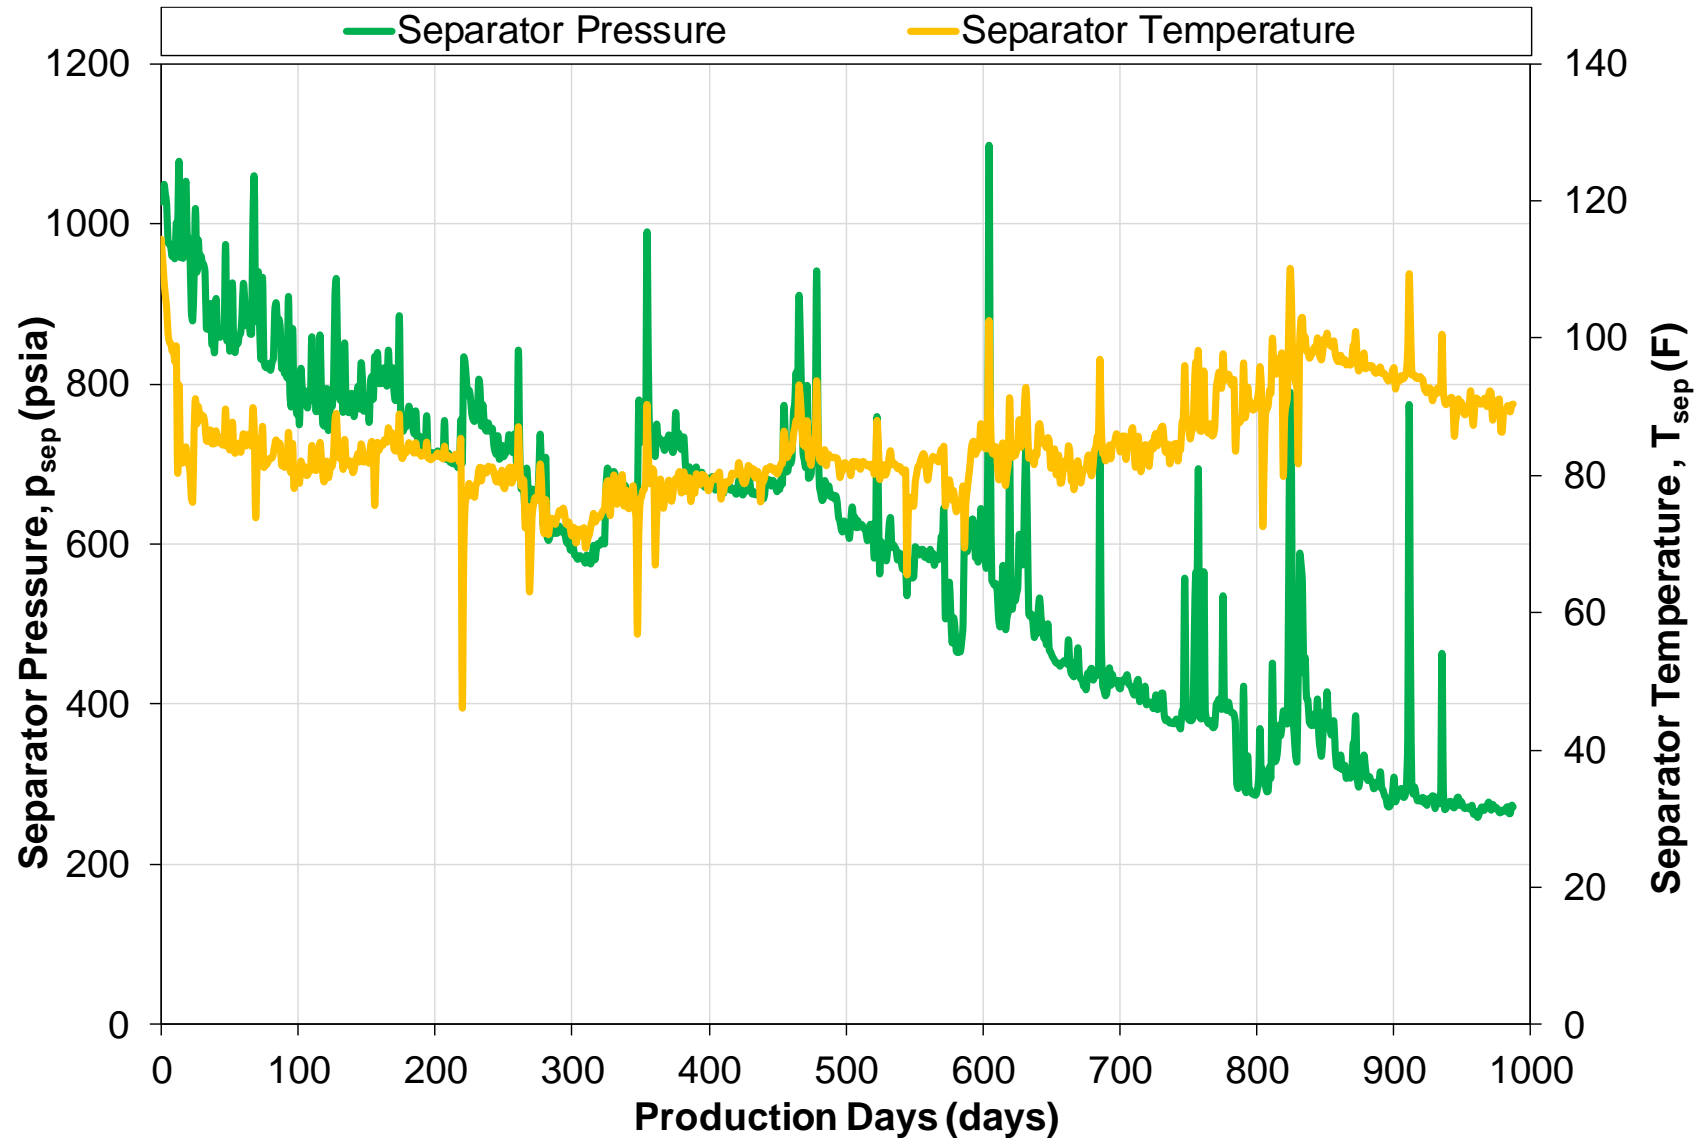


Example: Field Example 1

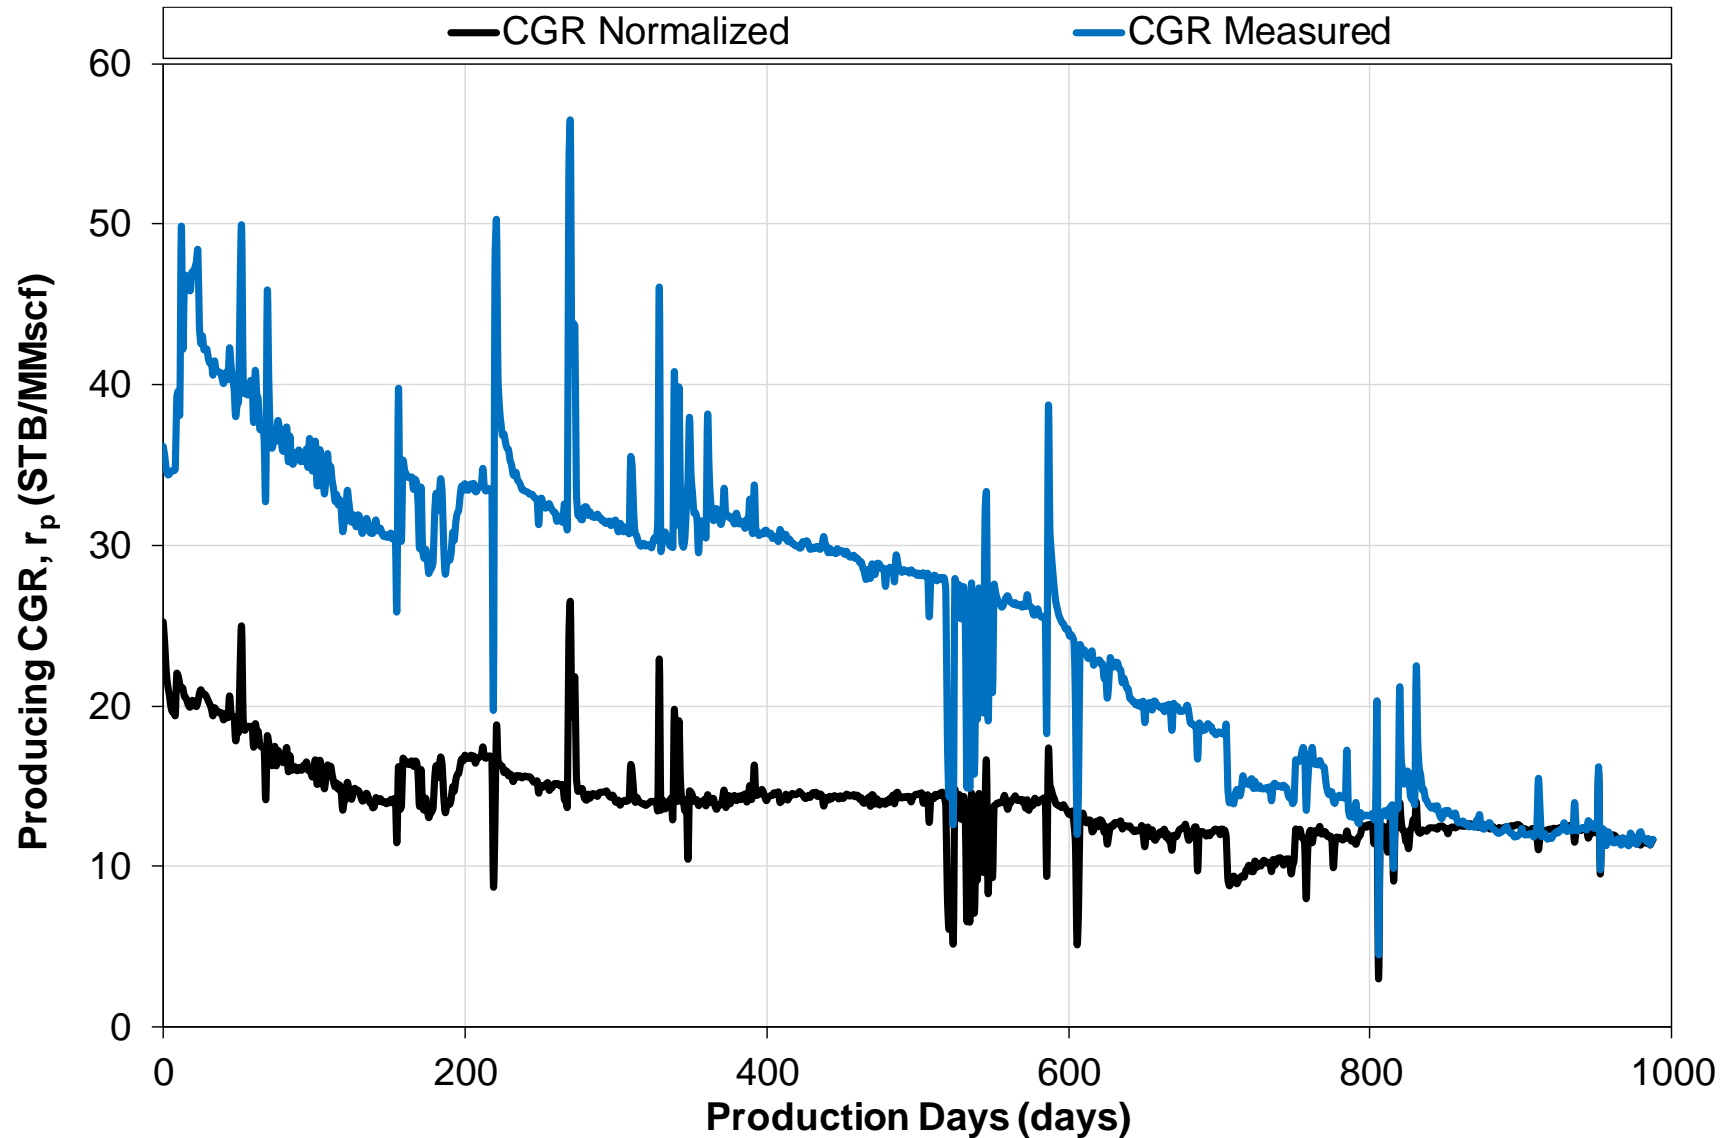

Example: Field Example 2

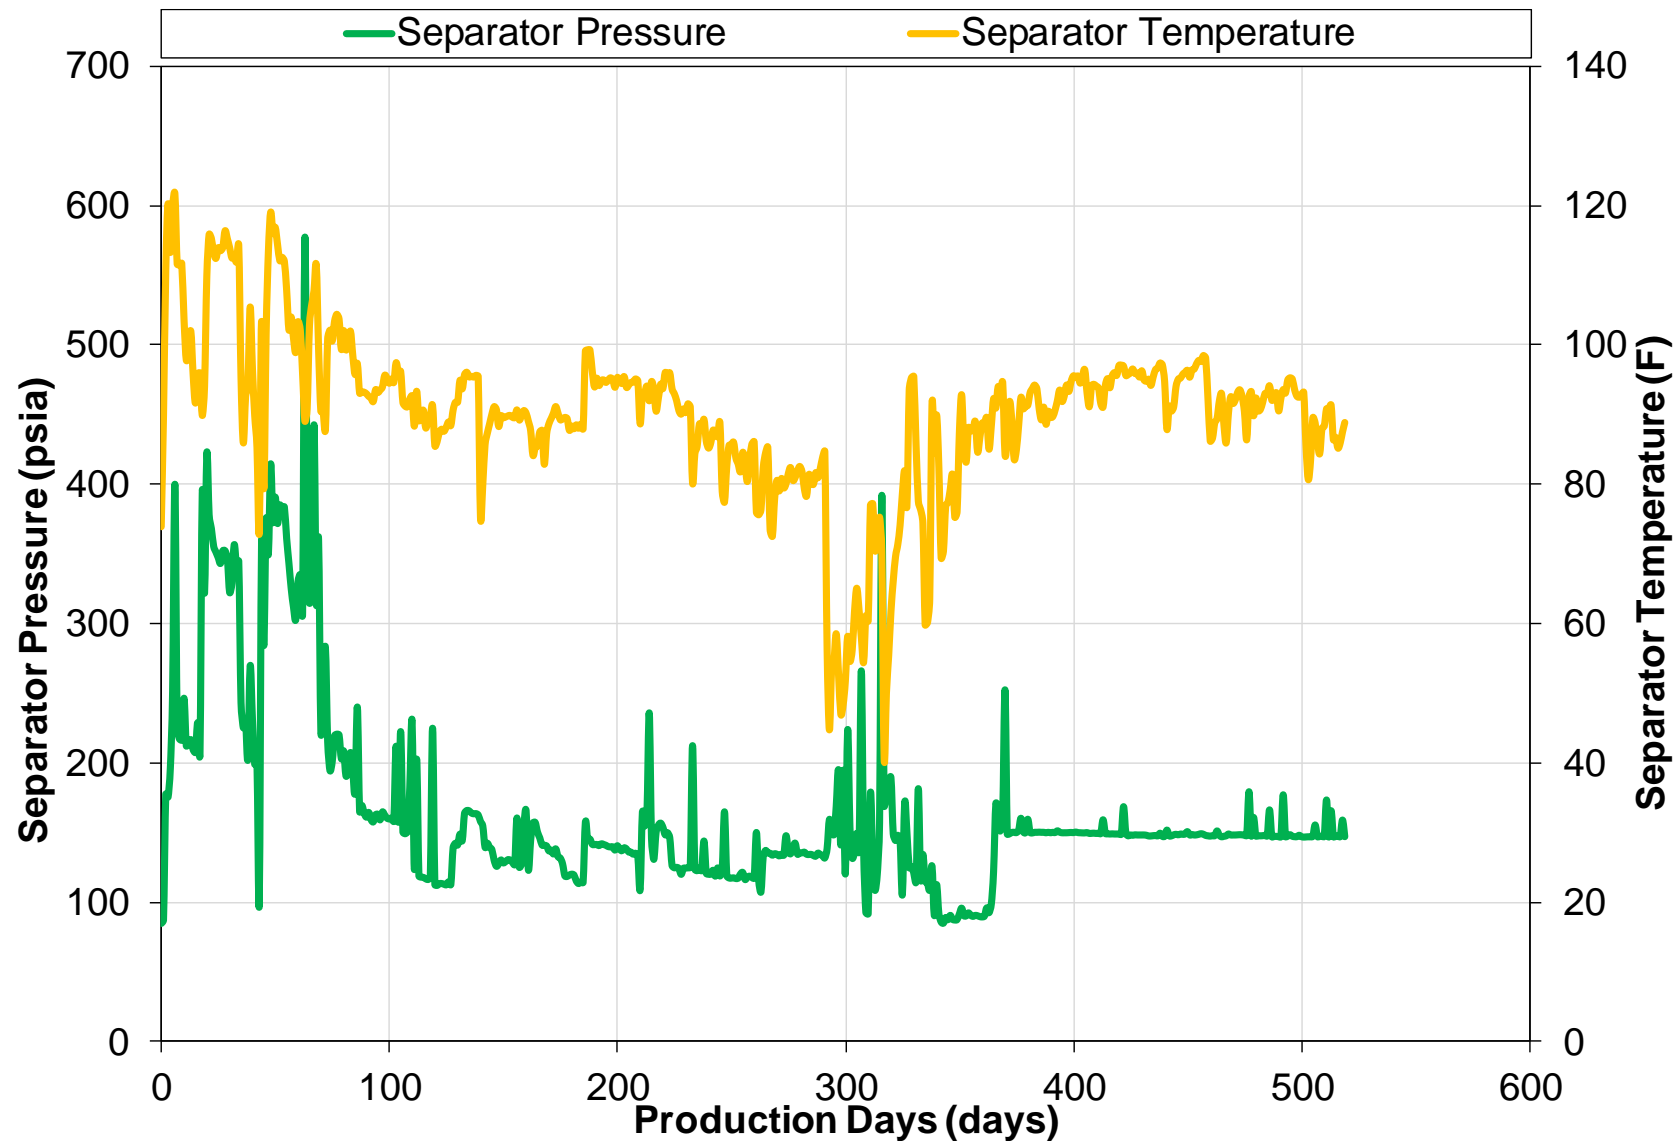

Example: Field Example 2

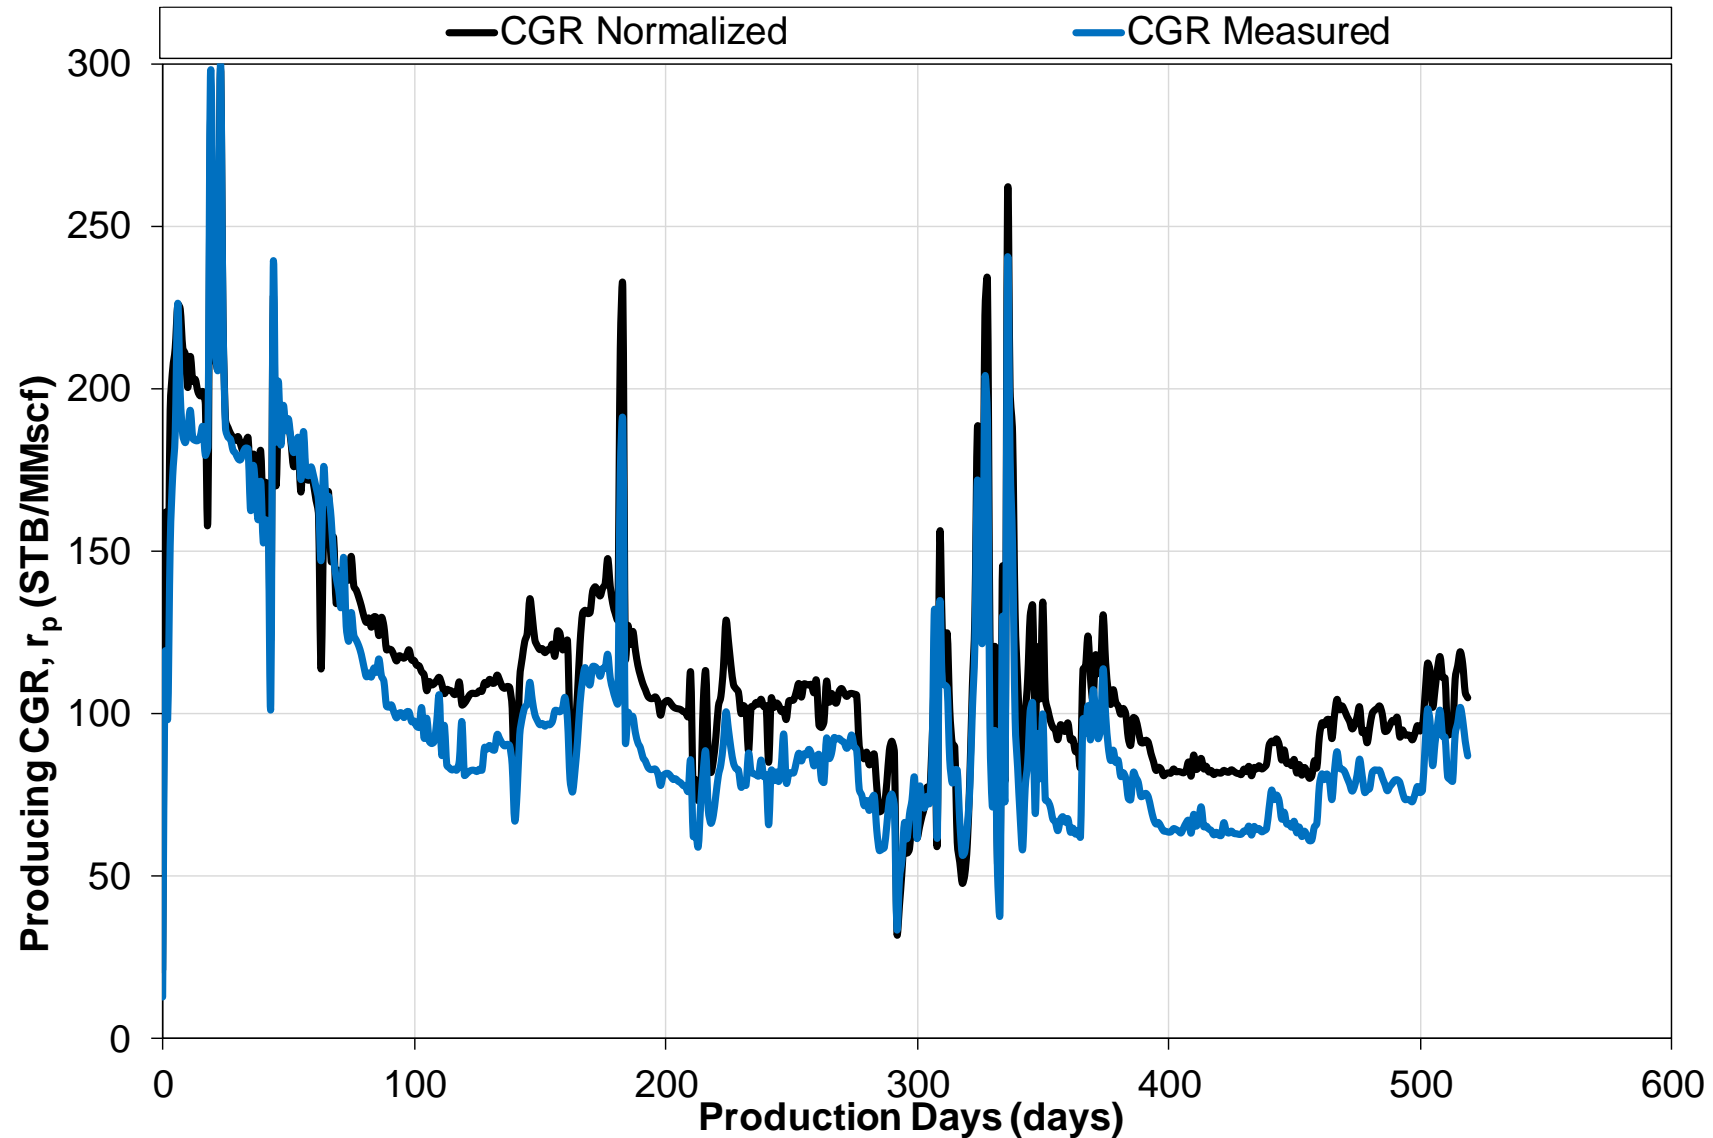

4.Closing Remarks

CGR normalization is ...

- Not important for black and volatile oil
e.g. $GOR_i < 2500 \text{ scf/STB}$
- But is important for near-critical fluids and gas condensates
e.g. $GOR_i > 2500 \text{ scf/STB}$

- Especially important when both
 - i) “produced fluid properties” (GOR / API)
 - ii) separator conditionschange significantly with time

The Proposed Scheme ...

- Can be used to calculate a set of consistent oil and gas rates for all wells in an asset
 - Consistent / “apples-to-apples” comparison throughout a field
 - i. CGR performance analysis
 - ii. HM purposes

Thank You
Innovation Norway
Norwegian Research Council
Colleagues at **whitson**



whitson